

Submit In Quadruplicate To:
MONTANA BOARD OF OIL AND GAS CONSERVATION
2535 ST. JOHNS AVENUE
BILLINGS, MONTANA 59102

SUNDRY NOTICES AND REPORT OF WELLS

Operator Alta Vista Oil Corporation		Lease Name: OG-43552-18
Address 2611 East Highway 14		Type (Private/State/Federal/Tribal/Allotted): State
City Clearmont	State WY	Zip Code 82835
Telephone 855-684-5891 ext 3 Fax		Well Number: GOLDEN MONKEY-1H
Location of well (1/4-1/4 section and footage measurements): SHL - SESW, 250' FSL & 1422' FWL BHL - SENW, 2329' FNL & 1661' FWL, Sec. 9, T11N R34E		Unit Agreement Name: SEP 10 2019
API Number: 25 087 21746		Field Name or Wildcat: Wildcat
Well Type (oil, gas, injection, other): Oil		Township, Range, and Section: T11N, R34E, Section 16
State 25 County 087 Well 21746		County: Rosebud

RECEIVED
SEP 10 2019
MONTANA BOARD OF OIL & GAS CONSERVATION - BILLINGS

Indicate below with an X the nature of this notice, report, or other data:

Notice of Intention to Change Plans <input type="checkbox"/> Notice of Intention to Run Mechanical Integrity Test <input type="checkbox"/> Notice of Intention to Stimulate or to Chemically Treat <input checked="" type="checkbox"/> Notice of Intention to Perforate or to Cement <input type="checkbox"/> Notice of Intention to Abandon Well <input type="checkbox"/> Notice of Intention to Pull or Alter Casing <input type="checkbox"/> Notice of Intention to Change Well Status <input type="checkbox"/> Supplemental Well History <input type="checkbox"/> Other (specify) _____ <input type="checkbox"/>	Subsequent Report of Mechanical Integrity Test <input type="checkbox"/> Subsequent Report of Stimulation or Treatment <input type="checkbox"/> Subsequent Report of Perforation or Cementing <input type="checkbox"/> Subsequent Report of Well Abandonment <input type="checkbox"/> Subsequent Report of Pulled or Altered Casing <input type="checkbox"/> Subsequent Report of Drilling Waste Disposal <input type="checkbox"/> Subsequent Report of Production Waste Disposal <input type="checkbox"/> Subsequent Report of Change in Well Status <input type="checkbox"/> Subsequent Report of Gas Analysis (ARM 36.22.1222) <input type="checkbox"/>
--	---


Describe Proposed or Completed Operations:

Describe planned or completed work in detail. Attach maps, well-bore configuration diagrams, analyses, or other information as necessary. Indicate the intended starting date for proposed operations or the completion date for completed operations.

The attached procedures will be followed for completion of the Golden Monkey-1H well. It is anticipated that the work will begin on 9/20/19. This sundry notice and the attached procedures are being submitted in accordance with 36.22.608.

BOARD USE ONLY	
Approved SEP 17 2019	Date
	Name
	Title

The undersigned hereby certifies that the information contained on this application is true and correct:

9/9/2019 

Date Signed (Agent)

Ben Shoup, Regulatory Advisor


Print Name and Title

Telephone: **307-299-5950**

SUPPLEMENTAL INFORMATION

NOTE: Additional information or attachments may be required by Rule or by special request.

Plot the location of the well or site that is the subject of this notice or report.

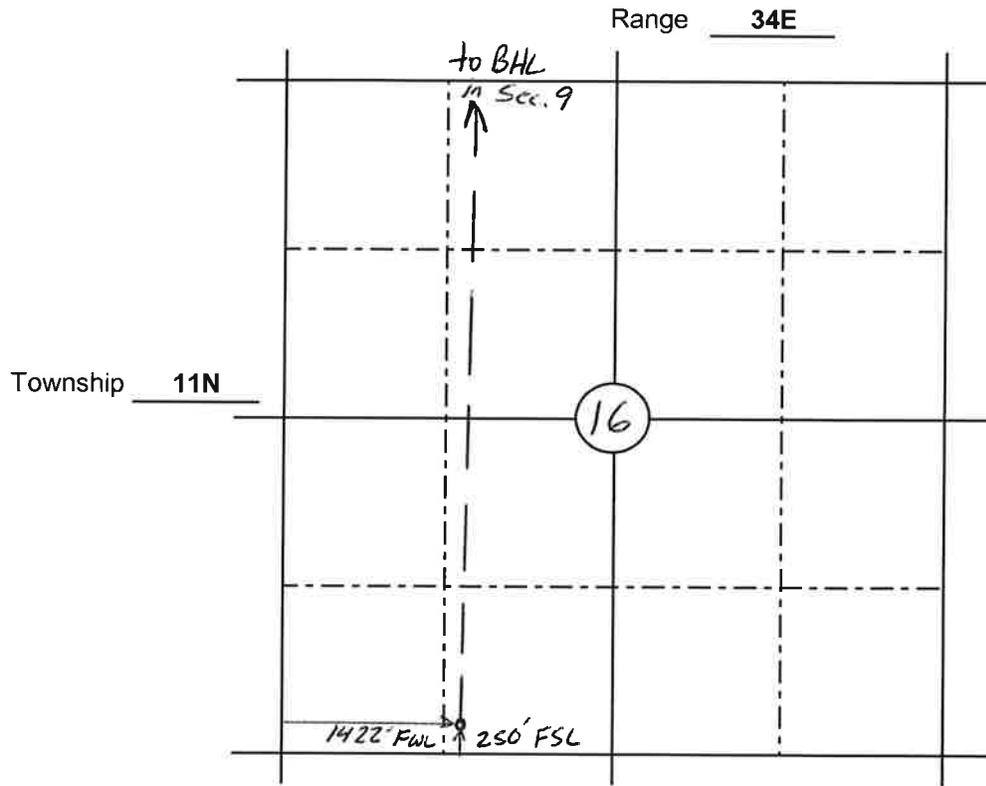

BOARD USE ONLY

CONDITIONS OF APPROVAL

The operator must comply with the following condition(s) of approval:

RECEIVED

SEP 10 2019

**MONTANA BOARD OF OIL &
GAS CONSERVATION • BILLINGS**

Failure to comply with the conditions of approval may void this permit.

08721746

MONTANA BOARD OF OIL AND GAS ATTACHMENT TO FORM 2 “CONDITIONS OF APPROVAL”

A. Field Inspector must be notified at least **24 hours** in advance of the start of fracture stimulation operation.

B. 36.22.1106 SAFETY AND WELL CONTROL REQUIREMENTS – HYDRAULIC FRACTURING

(1) New and existing wells which will be stimulated by hydraulic fracturing must demonstrate suitable and safe mechanical configuration for the stimulation treatment proposed.

(2) Prior to initiation of fracture stimulation, the operator must evaluate the well. If the operator proposes hydraulic fracturing through production casing or through intermediate casing, **the casing must be tested to the maximum anticipated treating pressure**. If the casing fails the pressure test it must be repaired or the operator must use a temporary casing string (fracturing string).

(a) If the operator proposes hydraulic fracturing through a fracturing string, it must be stung into a liner or run on a packer set not less than 100 feet below the cement top of the production or intermediate casing and must be tested to not less than maximum anticipated treating pressure minus the annulus pressure applied between the fracturing string and the production or immediate casing.

(3) A casing pressure test will be considered successful if the pressure applied has been held for 30 minutes with no more than ten percent pressure loss.

(4) A **pressure relief valve(s)** must be installed on the treating lines between pumps and wellhead to limit the line pressure to the test pressure determined above; the well **must be equipped with a remotely controlled shut-in device** unless waived by the board administrator should the factual situation warrant.

(5) **The surface casing valve must remain open** while hydraulic fracturing operations are in progress; the annular space between the fracturing string and the intermediate or production casing must be monitored and may be pressurized to a pressure not to exceed the pressure rating of the lowest rated component that would be exposed to pressure should the fracturing string fail.

History: 82-11-111, MCA; IMP, 82-11-111, MCA; NEW, 2011 MAR p. 1686, Eff. 8/26/11.